

93 mm Full-Flow Filter Assembly

Max Flow Rate

91 lpm / 24 gpm

See table for filter flow rates

Operating Pressure

1034 kPa / 150 psi

Oil Compatibility

Compatible with petroleum based fluids (hydrocarbon)


Pressure Relief Valve

Head includes a 1.72 bar / 25 psi relief valve



Head
3/4" -14 NPTF Ports
PART NO. P561134

Specification Illustrations

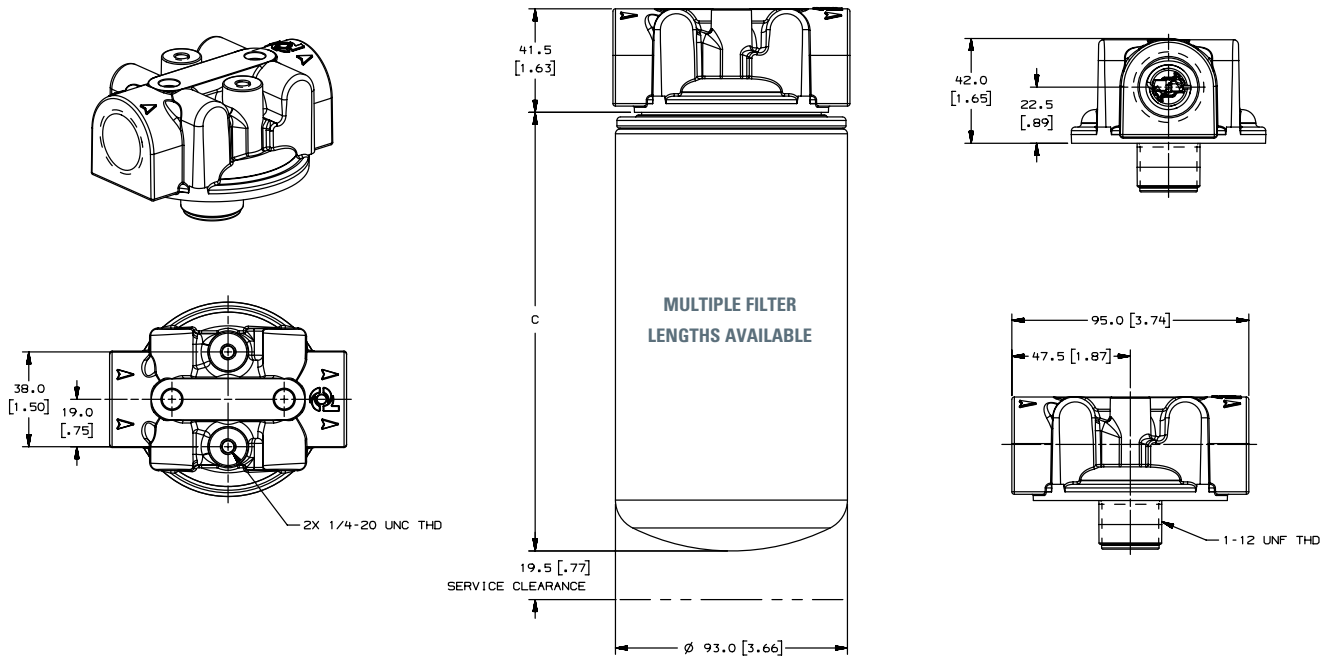



Filter Selection Chart

Maximum Recommended Flow Rate		(C) Filter Length		Media Type	Efficiency @ 99% per ISO 4548-12	Part Number	Performance Curve	Anti-Drain Back Valve	Filter Relief Valve Setting		
lpm	gpm	mm	in						bar	psi	
57	15	135.9	5.35	Cellulose	40 µm	P552819	B	Yes	1.30-1.60	18-23	
						P555680	C	–	1.30-1.60	18-23	
						P559418	B	Yes	2.48	36	
76	20	173.9	6.85			P553712	C	–	–	–	–
						P555616	A	Yes	–	–	
						P557207	C	–	0.50-0.70	7-10	
						P558250	B	Yes	0.80-1.00	11-17	
91	24	209.9	7.87			P553771	A	Yes	2.41	35	

Performance Curves

