

Ultrasulfomem® PF-PES

Pleated polyethersulfone membrane filter element

The Donaldson® Ultrasulfomem® PF-PES filter element, constructed with hydrophilic polyethersulfone membranes and all polypropylene components, exhibit both enhanced throughput and reliable particle retention for superior performance in most applications. PF-PES filter elements are compatible with a broad range of chemicals and pH extremes. The low protein binding characteristics of polyethersulfone membranes ensure that PF-PES filter elements are suitable for a variety of beverage, chemical and pharmaceutical applications.

Constructed using thermal welding techniques, PF-PES filter elements do not contain any adhesives or additives, and individual integrity testing assures that PF-PES filter elements meet the exacting performance requirements of our customers.

The PF-PES filter element is just one example of our dedicated commitment to fluid filtration. Our extensive portfolio includes filters for every stage of processing, and we can offer custom solutions for your unique applications. Donaldson is your complete source for filters, housings, and other filtration equipment.

Applications

The Donaldson Ultrasulfomem PF-PES filter element is designed and developed for the following industries and applications:

- Inks and dyes
- Acids, bases & oxidants
- Process water
- Pharmaceutical preparations
- Serums and tissue culture media

Dimensions & Specifications

| Materials | |
|------------------------|---------------------------------------|
| Filter Media: | Hydrophilic Polyethersulfone Membrane |
| Support Layers: | Polypropylene Microfiber |
| Core and Cage: | Polypropylene |
| End Caps and Adapters: | Polypropylene |

| Operational Limits | |
|---|--|
| Maximum forward differential pressure: 60 psid (4.1 bar) | |
| Maximum reverse differential pressure: 30 psid (2.1 bar) | |
| Maximum operating temperature: 180°F (82°C) at 10 psid (0.7 bar) in water | |



Ultrasulfomem PF-PES for clear and sterile filtration of liquids with the lowest possible differential pressure

| Integrity Testing | |
|--|---|
| Air diffusion per 10-inch module after saturation with clean water | |
| Pore Size Rating | Specification |
| 0.1 µm | ≤ 2.75 cu.in./min. at 50 psig (3.4 bar) |
| 0.2 µm | ≤ 1.16 cu.in./min. at 30 psig (2.1 bar) |
| 0.45 µm | ≤ 0.98 cu.in./min. at 20 psig (1.4 bar) |
| 0.65 µm | ≤ 0.73 cu.in./min. at 13 psig (0.9 bar) |

| Available Absolute Pour Size Ratings |
|---------------------------------------|
| 0.04, 0.1, 0.2, 0.45 and 0.65 microns |

Additional Information


Ultrasulfomem PF-PES filter elements may be autoclaved (250°F/121°C, 30 minute cycles) or *in-situ* steam sterilized (275°F/135°C, 30 minute cycles) for a maximum accumulated exposure of 10 hours. Alternatively, the filters may be sanitized with compatible chemical agents.

Donaldson certifies that the media used in its pleated filters meet the U.S. FDA requirements for processing beverage foods at up to 95°F, excepting distilled alcoholic beverages. Ultrasulfomem PF-PES filter elements meet the test criteria for USP Class VI-250°F Plastics

and pass the MEM Elution Cytotoxicity Test. Aqueous extracts from Ultrasulfomem PF-PES filter elements contain less than 0.25 EU/ml. The filters typically exhibit low levels of non-volatile residues.

These filter elements are designed and manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users should carefully verify chemical compatibility.

PF-PES Differential Pressure Per Ten Inch Equivalent (TIE) —Water

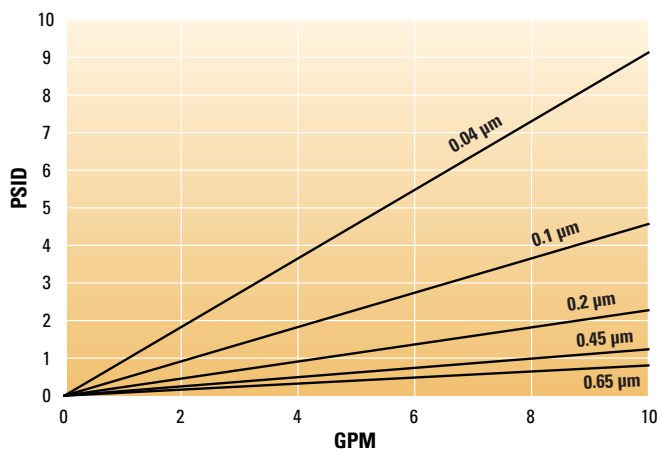

| Ordering Information | | | |
|--|--------------|------------------------|---------|
| Base Model Number | | | |
| 1C-PF-PES-P7-(Length Code)-(Rating Code) | | | |
| Example: 1C-PF-PES-P7-L3-M01 | | | |
| Element Length | | Absolute Micron Rating | |
| Code | Length (in.) | Code | Rating |
| L05 | 5 | M004 | 0.04 µm |
| L1 | 10 | M01 | 0.1 µm |
| L2 | 20 | M02 | 0.2 µm |
| L3 | 30 | M045 | 0.45 µm |
| - | - | M065 | 0.65 µm |

| Standard Element Configuration* | |
|---------------------------------|--|
| End #1 Adapter | 2 x 226 O-Ring |
| End #2 Adapter | Fin |
| Elastomer Material | EPDM (0.04 µm) Silicone (0.1-0.65 µm) |

*Other configurations available upon request



Donaldson Company, Inc.
Process Filtration
P.O. Box 1299
Minneapolis, MN
55440-1299 U.S.A.

Tel 800.543.3634 (USA)
Tel 800.343.3639 (within Mexico)
processfilters@donaldson.com
www.donaldson.com

Information in this document is subject to change without notice.

© 2007 Donaldson Co., Inc.
Printed in U.S.A. on recycled paper

Bulletin No. PRO-203 Ultrasulfomem PF-PES 10-08