

Versatile in Application, Flexible in Design

3rd Stage: Final Filter (Optional)



DOP

- 95% efficient on 0.3 micron mist & smoke

HEPA

- 99.97% efficient on 0.3 micron mist & smoke

2nd Stage: Primary Filter (select one)



Synteq XP - W


- For mist from water-soluble coolant
- Economical, fast draining, for heavy water-based liquid load

Synteq XP - S

- For smoke from machining
- Highest efficiency for challenging applications

Synteq XP - O

- For mist from straight oil machining
- Efficiency designed for small oil aerosols

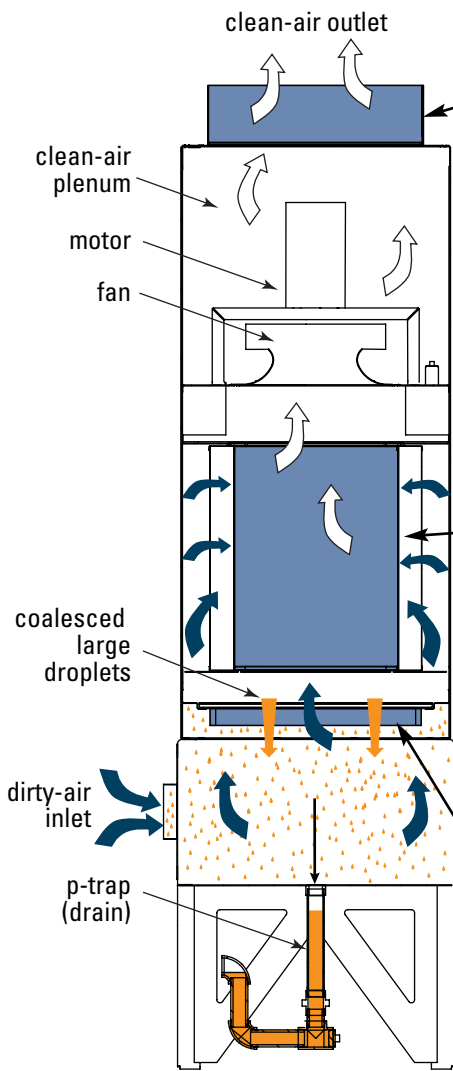

WSO 25-1
with afterfilter

1st Stage: Prefilter Options (select one)

Metal Screen

- For heavier dust/grit from wet grinding

Metal Mesh

- For most water-soluble mist

Polypropylene Mesh

- For most straight oil mist
- ### High Efficiency 1st Stage

- For oily smoke

