



## SMART

- The new Oilfreepac Smart Adsorption Dryer is your smart solution – just plug & play and it will take care of your compressed air
- The new Oilfreepac Smart communicates with you – operating your dryer the smart way
- No space? No Problem! The new Oilfreepac Smart will fit exactly where you need it

## RELIABLE

- The new Oilfreepac Smart stands for a reliable compressed air quality achievement according to ISO 8573-1:2010
- The new Oilfreepac Smart stands out through its low maintenance and the extremely long life-time
- The new Oilfreepac Smart stands up to the daily challenges with validated performance according to ISO 7183

## EFFICIENT

- Highest efficiency with lowest consumption of regeneration air
- The Oilfreepac Smart is conserving your resources while in operation
- The new Oilfreepac Smart adapts its operation to your needs and switches to energy saving mode whenever beneficial

## Oilfreepac SMART

### A new era in adsorption drying

With the Oilfreepac Smart a new era in adsorption drying has begun – equipped with a lot of features to make the Oilfreepac Smart the exact solution for your needs!

Rely on innovative technology when it comes to high quality and oilfree compressed air needs even under challenging conditions. Validated performance, and a complete new defined purification concept designed to last.

**Excellence in Performance – Innovative Concept- Smart Solution – Straightforward in Operation – Flexible to meet your needs!**

## INDUSTRIES



- Chemical



- Food Manufacturing



- Paint and Finish



- Environment



- Industrial Machinery



## MODULARITY

### Flexible is the new Standard!

The Oilfreepac Smart comes with a new feature. With the new modular options you can find the right location for your dryer the smart way.


The new Oilfreepac Smart just fits!



## TURNABLE DISPLAY

Smart display concept one step further. Protect your dryer display during heavy operation by easily turning it down.

With the display down, you still have the LED status light in sight – The new Oilfreepac Smart just fits!

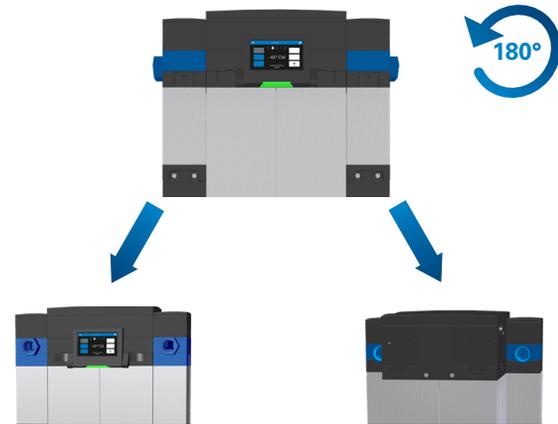

## ROTATABLE INLET / OUTLET CONNECTION

Smart and easy inlet / outlet configuration by simply rotating the connection modules to the position that will fit your site.

No modifications, no additional equipment, no investment.

The new Oilfreepac Smart just fits!

## INDEPENDENT DISPLAY MOUNTING

Smart placement of the display independent from the dryer itself.

The new Oilfreepac Smart just fits!





## ULTRASILENCER


### Silent operation!

The UltraSilencer is a completely new and smart silencer concept that will reduce the sound level to a range of 60 dB(A).

Enjoy the freedom to choose the best location for your dryer – even directly at workplaces.

No housing or other soundproofing measures are required!

The new Oilfreepac Smart – The silent choice!

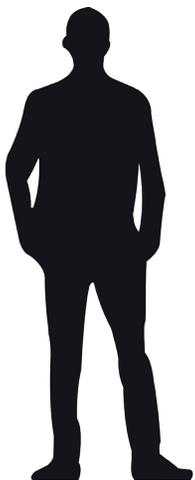

## DESICCANT CARTRIDGES

### Reliable operation!

New desiccant cartridge design in consideration of free flow in compressed air units. The flow-optimized design with low pressure drop is resistant against pressure and flow fluctuations.

The desiccant is pre-stressed with full utilization of adsorbent even at partial flow. With the new activated carbon cartridge there is almost no start-up time to reach the required dew point.

During service the compact desiccant cartridges will be replaced one by one from the adsorption dryer, so only small replacement space is needed. This gives additional advantages for your stock management.

Furthermore the highly efficient cartridges give you the confidence of achieving the compressed air quality you need!

The new Oilfreepac Smart – The reliable choice!




## ULTRAPLEAT FILTER ELEMENTS

### Efficient operation!

The UltraPleat™ filtration technology uses a new structure of coated high-tech fibres that are processed into a pleated filter medium with a high separation efficiency of liquid particles and a huge adsorption capacity for solid particles. The multilayer structure of the new filter medium was designed so that optimal aerodynamic conditions are achieved, simultaneously providing a filter surface that is over 400% larger by comparison with wrapped filter media. For the separation of oil aerosols, an efficiency of up to  $\geq 99.9\%$  is achieved.

The new Oilfreepac Smart – The efficient choice!



## RESOURCE CONSERVING

### Eco operation!

The new Oilfreepac Smart is conserving your resources while in operation.

Not only the high efficient components, but also the whole dryer concept with capacity control and intermittent operation leads to highest energy savings and low consumption of regeneration air.

The new Oilfreepac Smart – The profitable choice!



## CONSISTENTLY SMART

### Smart Design!

#### Efficiency

The new Oilfreepac Smart is an efficient overall concept! The whole compressed air unit and all components are flow-optimized – high efficiency at lowest pressure drop. Furthermore the intermittent operation ensures minimal consumption of regeneration air. With the dew point dependent capacity control, the Oilfreepac Smart adapts regeneration cycles to your actual operation conditions and switches to energy saving mode whenever beneficial.

The new Oilfreepac Smart – Conserving your resources the smart way!

#### Reliable

Rely on the new Oilfreepac Smart when it comes to achieving high quality and clean compressed air! The new Oilfreepac Smart will achieve compressed air quality according to ISO 8753-1. The new Oilfreepac Smart – Reliability the smart way!

#### Validation

The new Oilfreepac Smart is not only a promise. At Donaldson our approach is to encourage transparency by validation of our complete product portfolio. This gives you the reassuring feeling to rely on a proven concept. Furthermore it makes the performance of the Oilfreepac Smart measurable and therefore comparable.

The new Oilfreepac Smart – Designed the smart way!


- **Oilfreepac Smart Dryer ISO 7183**
- **Ultrapleat Pre- and Afterfilter ISO 12500**
- **Silencer UltraSilencer ISO 3744**

#### Service-friendly

The new Oilfreepac Smart manifests itself through its service-friendliness. During services, the Oilfreepac Smart remains firmly installed and within the pipeline, which ensures safe execution and minimum downtime. No special tools are needed and all maintenance parts are easily accessible.

The overall concept is designed to keep it simple: all services are self-explanatory and time-saving!

The new Oilfreepac Smart – Easy service the smart way!

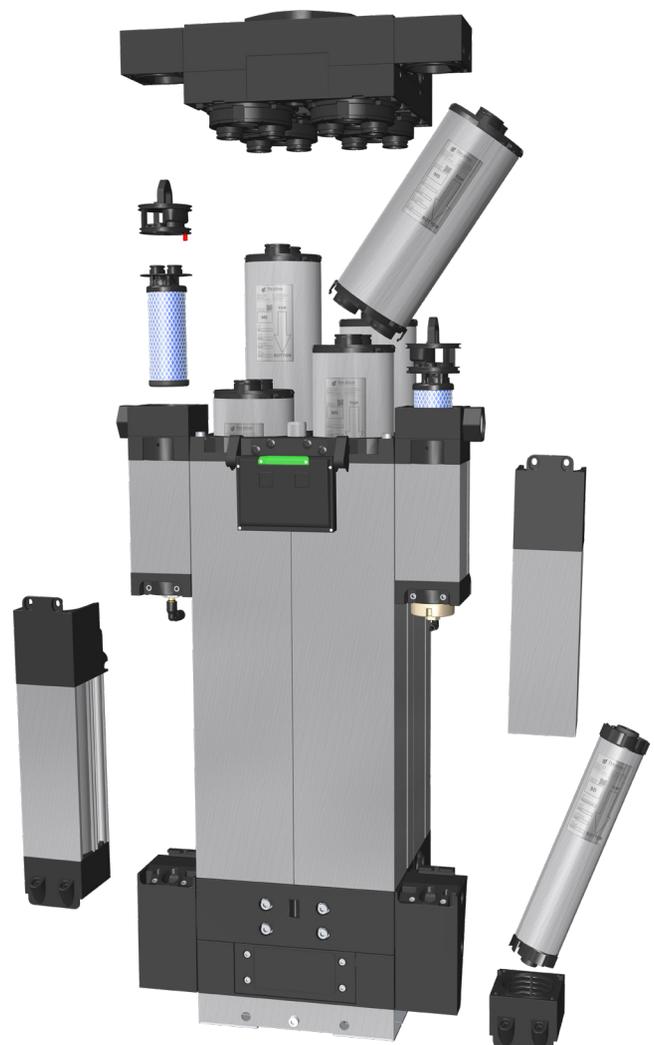

# OILFREEPAC SMART OFF

## Oilfreepac SMART VERSIONS

### The perfect dryer for your needs!


The new Oilfreepac Smart is available in two versions: Superplus and Standard.

All variants are highly efficient with lowest differential pressure, minimum regeneration air consumption, and intermittent operation. All models from each version ensure you the reliable achievement of compressed air quality classes according to ISO 8573-1. Compile all options you need and choose the version most suitable for your operation!

	SUPERPLUS	STANDARD
<b>Components</b>		
Activated Carbon	•	•
Silencer UltraSilencer	•	•
Pre- & Afterfilter UltraPleat™	•	•
LED Status Indicator	•	•
Dew Point Transmitter	•	•
Orifice Set	•	•
<b>Display</b>		
Touch Display	•	•
<b>Modularity</b>		
Rotatable Connections	•	•
Independent Display Mounting (Option)	•	•
<b>Efficiency</b>		
Low Differential Pressure	•	•
Low Regeneration Air Consumption	•	•
Compressed Air Quality acc. to ISO 8753-1	•	•
Intermittent Operation	•	•
Dew Point Control	•	•
<b>Easy Service</b>		
All Spare Parts easy accessible	•	•
No Special Tools required	•	•
Reduced Downtimes	•	•
<b>Connectivity</b>		
Alarm Contact	•	•
Industry 4.0 ready	•	•

# OILFREEPAC SMART OFP

## OILFREEPAC SMART DIMENSIONS

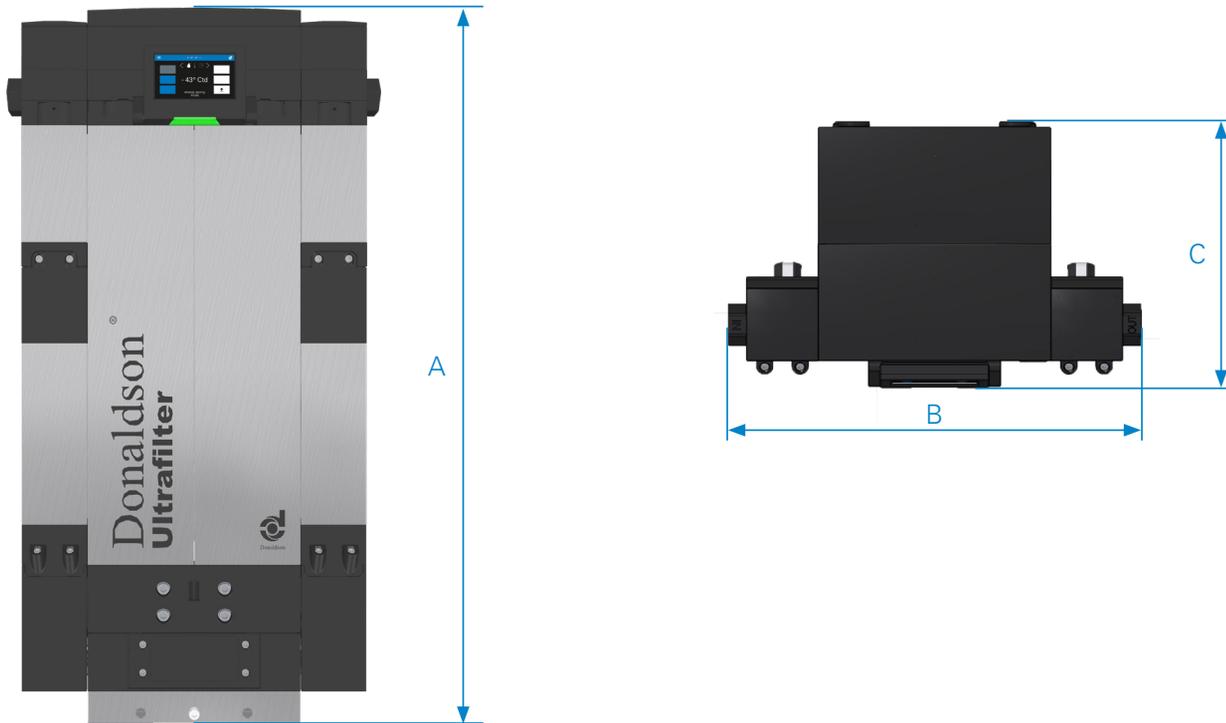

	Type	A mm		B mm	C mm		Weight kg
		Standard	Superplus		Standard	Superplus	
MINI	0005	490	497	314	172	191	16
	0010	757	764	314	172	191	26
	0015	1024	1031	314	172	191	38
	0020	1291	1298	314	172	191	48
	0025	1558	1565	314	172	191	58
MIDI	0035	849	866	464	276	291	60
	0050	1113	1130	464	276	291	80
	0065	1377	1394	464	276	291	101
	0080	1641	1658	464	276	291	121
	0100	1905	1922	464	276	291	141

## TECHNICAL DATA

	Type	Nominal Flow m <sup>3</sup> /h	Connection
MINI	0005 - 0025	5- 25	1/2"
MIDI	0035 - 0100	35-100	1"

# OILFREEPAC SMART OFP

## PRODUCT DESCRIPTION

### Function description


Compressed air is led through the inlet of the dryer (I) and across the prefilter (1). At this stage, the air is cleaned from particles and condensate. The condensate is removed via the condensate drain (2).

Via the lower shuttle valve (4), the air is led into the desiccant cartridges (3), in which the air is dried down to the required dew point. In the following activated carbon purification stage (7) oil vapours, hydrocarbons, taste and odour are adsorbed. Via the upper shuttle valve, the air gets into an afterfilter (9), in which possible particles from the desiccant are retained.

Via the outlet (O), the clean and dry compressed air is led into the air network to the point of use.

While one vessel with desiccant cartridge(s) is in the drying phase (adsorption), the cartridge(s) of the other vessel will be dried (regeneration).

A partial flow of dried air is expanded via an orifice and led across the desiccant cartridges for regeneration and via a solenoid valve and a silencer system (6) to the atmosphere.

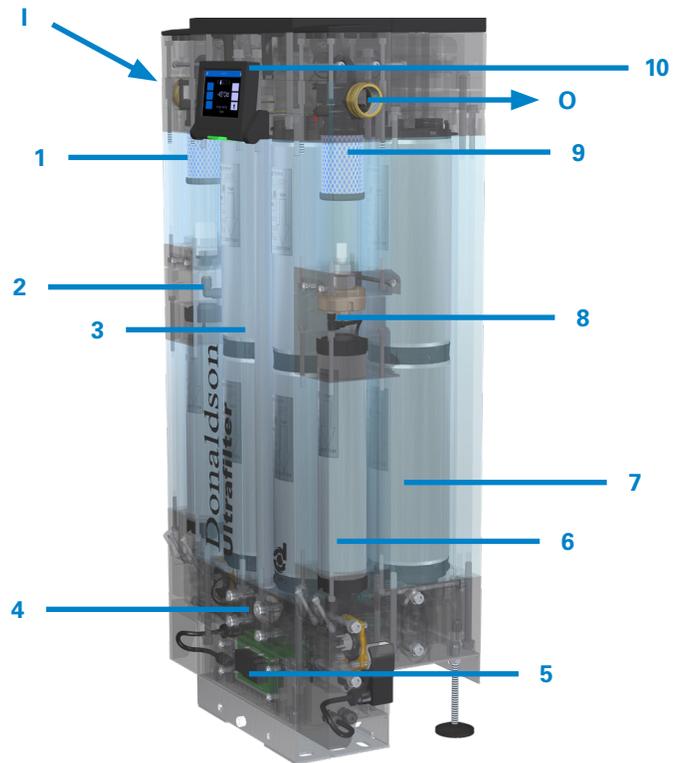

### Main Components

- |                         |                                     |                              |
|-------------------------|-------------------------------------|------------------------------|
| 1 Prefilter UltraPleat™ | 5 Electrical Controller             | 9 Afterfilter UltraPleat™    |
| 2 Condensate Drain      | 6 Silencer UltraSilencer            | 10 Touch Display (Superplus) |
| 3 Desiccant Cartridges  | 7 Activated Carbon Cartridges       |                              |
| 4 Lower Shuttle Valve   | 8 Dew Point Transmitter (Superplus) |                              |

### Air Quality related to standard inlet conditions

Particles	Class 1-2: ISO 8573-1
Residual Oil Content (liquid oil)	< 0,01mg/m <sup>3</sup> (Class 1: ISO 8573-1)
Oil Vapour and Hydrocarbons	< 0,003mg/m <sup>3</sup> (Class 1: ISO 8573-1)
Water Vapour	PDP-40°C =0,11 g/m <sup>3</sup> (Class 2: ISO 8573-1)
Taste and Odours	Taste and odour free

# OILFREEPAC SMART OFP

## PRODUCT SPECIFICATION

Type	Nominal flow inlet m <sup>3</sup> /h	Regeneration air averaged m <sup>3</sup> /h	Outlet (min.) m <sup>3</sup> /h	Prefilter UltraPleat™ S	Afterfilter UltraPleat™ S	UltraSilencer Cartridges QTY	Desiccant Cartridges QTY/Adsorber	Activated Carbon Cartridges QTY/Adsorber
0005	5	0,85	3,95	0035	0035	2	1	1
0010	10	1,70	7,90	0035	0035	2	2	2
0015	15	2,55	11,85	0035	0035	2	3	3
0020	20	3,40	15,80	0035	0035	4	4	4
0025	25	4,25	19,75	0035	0035	4	5	5
0035	35	5,95	27,65	0070	0070	2	2	2
0050	50	8,50	39,50	0070	0070	2	3	3
0065	65	11,05	51,35	0070	0070	4	4	4
0080	80	13,60	63,20	0120	0120	4	5	5
0100	100	17,00	79,00	0120	0120	4	6	6

\* related to the intake condition of the compressor +20 °C, 1 bar (abs), at compressed air inlet temperature of +35 °C and 7 bar (g) operating pressure.  
Pressure dew point: -40 °C, minimum pressure: 4 bar (g), maximum pressure: 14 bar (g) (type 0005 to 0025), 12 bar (g) (type 0035 to 0100), inlet temperature: min +5 °C, max +55 °C (dimensioning see below)

## TECHNICAL CONFIGURATION

°C / bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
20	0,91	0,99	1,08	1,16	1,23	1,30	1,37	1,43	1,49	1,55	1,61	1,66	1,72
25	0,89	0,98	1,07	1,15	1,22	1,29	1,36	1,42	1,47	1,53	1,59	1,65	1,70
30	0,83	0,97	1,06	1,13	1,21	1,27	1,34	1,40	1,46	1,51	1,56	1,62	1,67
35	0,63	0,75	0,88	1,00	1,12	1,25	1,33	1,39	1,45	1,50	1,55	1,60	1,65
40	0,48	0,57	0,67	0,76	0,86	0,95	1,05	1,14	1,24	1,33	1,43	1,52	1,62
45	0,37	0,44	0,51	0,58	0,66	0,73	0,81	0,88	0,95	1,03	1,10	1,17	1,25
50	0,28	0,34	0,40	0,46	0,51	0,57	0,63	0,68	0,74	0,79	0,85	0,91	0,97
55	0,22	0,27	0,31	0,36	0,40	0,44	0,49	0,53	0,58	0,62	0,67	0,71	0,76

\* Maximum operating pressure 14 bar (g) (type 0005 to 0025), 12 bar (g) (type 0035 to 0100)

**Example:**  $\dot{V}_{nom} = 22 \text{ m}^3/\text{h}$ , Inlet temperature = 25°C, Operating pressure = 12 bar (g)

$$\dot{V}_{corr} = \frac{\dot{V}_{nom}}{f} = \frac{22 \text{ m}^3/\text{h}}{1,47} = 14,97 \text{ m}^3/\text{h}$$

Calculated dryer size: **Type 0015**

<b>Power Supply</b>	220-230 VAC / 50-60Hz, 110-115 VAC / 50-60Hz, 24 VDC
<b>Power Consumption</b>	Standard: 12W / Superplus: 16W
<b>Operating Pressure</b>	min. 4 bar / max. 14 bar (type 0005 to 0025), 12 bar (type 0035 to 0100)
<b>Media</b>	Compressed Air / Nitrogen
<b>Media Temperature</b>	min. 5°C / max. 55°C
<b>Ambient Temperature</b>	min. 4°C / max. 50°C
<b>Pressure Dew point</b>	-40°C at 100% nominal load / -70°C at 70% nominal load
<b>Sound Power Level acc. to DIN EN ISO 3744</b>	60 dB(A)
<b>Declaration of Conformity</b>	acc. 2014/35/EU and 2014/68/EU