



Donaldson
FILTRATION SOLUTIONS

PP-Q

NOMINAL POLYPROPYLENE FILTER ELEMENTS

Process Filtration

Pleated polypropylene filter elements.

PP-Q elements are manufactured in a white room for high quality and compliance with market regulations. The PP-Q filter elements comply with FDA requirements for food contact per CFR Title 21 and all components meet USP Class VI Plastics biological reactivity tests.

These elements are produced in continuous 10-inch length increments from 10 to 40 inches long and are available in all common end cap configurations.

APPLICATIONS

- RO pre-filters
- Process water
- Plating solutions
- Chemicals
- Waste and wastewater
- Food and beverage
- Bottled water
- Microelectronics
- Paints/inks
- Cosmetics



PP-Q

FEATURES	BENEFITS
100% polypropylene construction	Wide range of chemical compatibility
Rigid, molded cage	Greater structural integrity
Gradient, fixed pore structure	Increased dirt holding capacity and resistance to unloading under high differential pressure
5.6 square feet of media surface per 10" length	High throughput and particle retention; longer service life and reduced maintenance costs

SPECIFICATIONS

MATERIALS	
Filter Media	Polypropylene
Outer Cage	Polypropylene
Core	Polypropylene
End Caps	Polypropylene
O-Rings	Standard: Silicone Optional: Buna, EPR, Teflon ^{®*} encapsulated Viton ^{®**}

NOMINAL LENGTHS
10", 20", 30", 40"

DIMENSIONS	
Outside Diameter	2.67"
Inside Diameter	1.0"
Media Surface Area	5.6 sq ft per 10" in length

* Teflon is a registered trademark of E.I. du Pont Nemours and Company or its affiliates.
** Viton is a registered trademark of DuPont Performance Elastomers L.L.C.

SPECIFICATIONS

AVAILABLE MICRON RATINGS

0.2, 0.5, 1, 3, 5, 10, 25, 50 microns

MAXIMUM TEMPERATURE

176°F

DIFFERENTIAL PRESSURE

Recommended change-out differential pressure: 35 psid

Maximum differential (collapse) pressure: 75 psid @ 70°F,
40 psid @ 176°F

SANITATION AND STERILIZATION


Hot water at 175°F @ 5 psid for 30 minutes

In-line steam at 257°F @ 1 psid for 30 minutes

Autoclavable at 257°F for 30 minutes

PORE SIZE	BETA 20 95%	BETA 10 90%
0.2 micron	0.25	0.20
0.5 micron	0.5	0.5
1 micron	1.25	1.0
3 micron	4.0	3.0
5 micron	6.5	5.0
10 micron	12.0	10.0
25 micron	28.0	25.0
50 micron	58.0	50.0

PP-Q – FLOW CHARACTERISTICS (WATER)

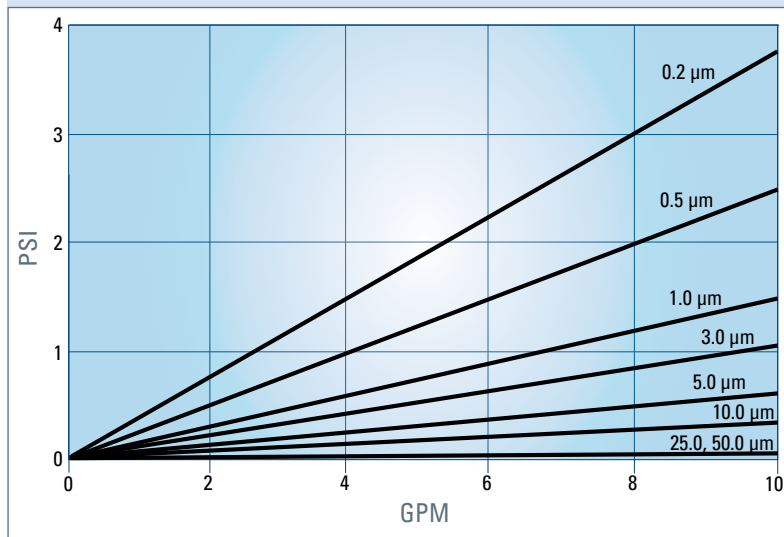

This chart represents estimated pressure drop for various flow rates using a 10" element. For elements longer than 10" or assemblies using multiple elements, data can be extrapolated linearly. The chart does not account for pressure drop contributed by the housing.



Important Notice

Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, specifications, availability and data are subject to change without notice, and may vary by region or country.



Donaldson Company, Inc.
Minneapolis, MN

donaldson.com
shop.donaldson.com

Australasia 61-02-4350-2066
marketing.australia@donaldson.com

Brazil 55-11-4894-6035
vendas.brasil@donaldson.com

China 86-400-921-7032
info.cn@donaldson.com

EMEA 49-2129-569-0
cap-europe@donaldson.com

India 91-124-4807-400
indiaenquiries@donaldson.com

Japan 81-42-540-4123
ndl-ultrafilter-web@donaldson.com

Korea 82-2-517-3333
cap-kr@donaldson.com

Latin America 52-449-300-2442
industrialair@donaldson.com

North America 800-543-3634
processfilters@donaldson.com

South Africa 27-11-997-6000
samarketing@donaldson.com

Southeast Asia 65-6311-7373
sea.salesenquiry@donaldson.com

F119108 ENG (04/19) PP-Q Nominal Polypropylene Filter Elements

© 2019 Donaldson Co., Inc. All Rights Reserved. Donaldson and the color blue are marks of Donaldson Company, Inc. All other marks belong to their respective owners. {Contains Donaldson proprietary technology.}