

- Individually tested and certified at HEPA grade filtration efficiency of 99.97% on 0.3 µm diameter DOP dust particles per MIL-STD-282
- Design features a helically wound filter “pack” encased in a stainless steel frame with a flange at one end to fit inside the bolt circle of a duct flange
- Filter media pack comes closed on all sides with a solid resin sealant and forms a completely leak-proof seal with frame
- All glass web filter media comes in a continuous sheet folded into closely spaced pleats with hemmed edge corrugated aluminum separators
- Highest possible use in low flow, round duct ventilation systems, high pressure process systems or process air, nitrogen, or argon stream capacities




**Ultra™ Cylindrical HEPA Filters**

## **STANDARD FEATURES**

- Captures submicron particles from air or gas streams over a wide pressure range
- Eliminates square-to-round adapters
- Urethane gaskets are glued in to ensure effective sealing
- Three different diameters to fit inside 8, 10, and 12-in. (203, 254, 305 mm) round sheet metal ductwork
- Exceptional filtration at temperatures up to 275°F (135°C)

**INITIAL RESTRICTION VS. FACE VELOCITY**

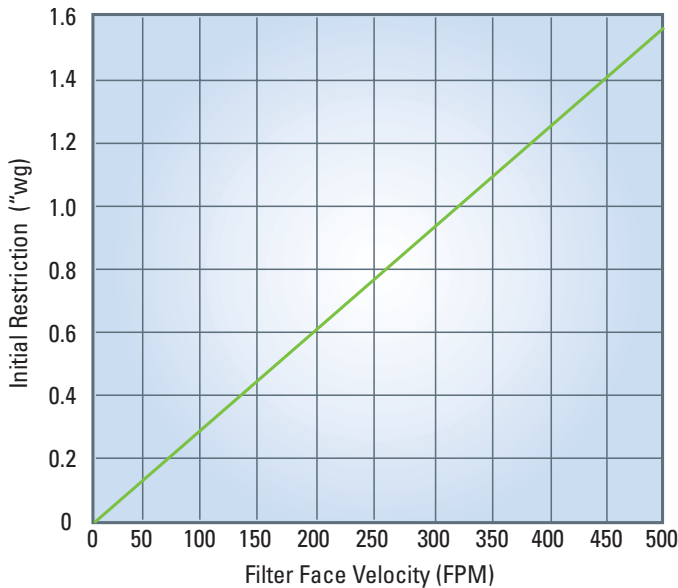

Note: This graph represents a typical rating. 5-1/8" (130.2 mm) filters are tested at 100 fpm (30.5 m/min) at the factory. Maximum recommended service restriction is 1.20 "wg.

**Ultra Cylindrical HEPA Filters**  
Stainless Steel Frame • 99.97% Effective on 0.3 micrometers

Part Number	Flow		Body Diameter		Length		Flange Diameter	
	cfm	m³/h	in	mm	in	mm	in	mm
P199739	48	82	7.75	196.9	5.1	127.3	9.0	228.6
P194410	84	119	7.75	196.9	10.25	260.4	9.0	228.6
P194411	162	229	9.75	247.7	10.25	260.4	11.0	279.4
P194412	240	340	11.75	298.5	10.25	260.4	13.0	330.2

No further claims about implied usage.

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts. **Call Donaldson Torit at 800-365-1331.**

**Important Notice**

Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.



Donaldson Company, Inc.  
Minneapolis, MN  
[donaldson.com](http://donaldson.com) • [shop.donaldson.com](http://shop.donaldson.com)

**North America**  
Email: [donaldson@donaldson.com](mailto:donaldson@donaldson.com)  
Phone: (USA): 800-365-1331 • (MX): 800-343-3639

**Australasia**  
Email: [marketing.australia@donaldson.com](mailto:marketing.australia@donaldson.com)  
Phone: +61 2 4350 2000  
Toll Free: (AU) 1800 345 837 • (NZ) 0800 743 387

F118169 ENG (06/18) Ultra Cylindrical HEPA Filters ©2011-2018 Donaldson Company, Inc.  
Donaldson, Torit and the color blue are marks of Donaldson Company, Inc. All other marks belong to their respective owners.

**China IAF**  
Email: [info.cn@donaldson.com](mailto:info.cn@donaldson.com)  
Phone: (86) 400-820-1038

**Donaldson Europe B.V.B.A.**  
Email: [IAF-europe@donaldson.com](mailto:IAF-europe@donaldson.com)  
Phone: +32 (0) 16 38 38 11

**India**  
Email: [marketing.India@donaldson.com](mailto:marketing.India@donaldson.com)  
Phone: +91 124 4807400  
Toll Free: 18001035018

**Latinoamerica**  
Email: [IndustrialAir@donaldson.com](mailto:IndustrialAir@donaldson.com)  
Phone: +52 449 300 2442

**South Africa**  
Email: [SAMarketing@donaldson.com](mailto:SAMarketing@donaldson.com)  
Phone: +27 11 997 6000

**Southeast Asia IAF**  
Email: [IAF.SEA@donaldson.com](mailto:IAF.SEA@donaldson.com)  
Phone: (65) 63117373